

TWISTER T4 TRIMMER

EUROPEAN MODEL

DETAILS MATTER.

The Twister T4, whether your goal is to increase throughput, maximize trimmed flower quality or produce high-quality extraction ready trim—or all of the above, customization is key.

The new T4 now standard with Speed Control allows you to customize tumbler and blade speed as well as decrease vacuum suction to match your trimming setup to align with your harvesting goals. With six settings each for both the tumbler and the blade, the new T4 gives you thirty-six trimming styles in one quality machine.

AVAILABLE T4 ACCESSORIES & COMPONENTS

T4 Leaf Collector	23-0170E-01-P
Twister T4 Stand (no vacuum)	23-0229-00
Twister T4 Stainless Steel Stand (no vacuum)	23-0030
T4 Rail (Double)	24-0140-P
T4 Rail (Triple)	24-0139-P
Twister Feed Conveyor (inbound)	26-0001E-01
Twister Quality Control Conveyor (outbound)	26-0002E-01
Twister Feed Conveyor (extra tall for T4 Rail)	26-0102E-00

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



SPECIFICATIONS

Product Number	24-9020-00-P
Input Voltage	230V, 50 Hz
Current Draw	2A
Blade Motor	200W
Blade Speed	980-1875 RPM
Tumbler Motor	6W
Tumbler Speed	47-96 RPM
Tumbler Diameter	5in / 10.1cm
Tumbler Slots	40 x .25in/.6cm
Cut Height	.040in / 1mm
Weight	56lbs /25.4kg
Shipping Weight (w/ T4-LC)	120lbs / 54.4kg
Length	25in / 63.5cm
Width	15in / 38.1cm
Height	16.5in / 42cm
Circuit Breaker Required	10A / 230V
Connector (plug)	CEE 7/7
Certifications	CE, RoHS
Filter Bag Included	70 Micron

Additional Requirements

Extension Cord	14 AWG (minimum AWG size) 7.6m / 25ft max length
----------------	---

Connector (plug)



TWISTER B4 BUCKER

EUROPEAN MODEL

DETAILS MATTER.

The Twister B4 is the world's fastest medical cannabis and hemp destemming machine, equipped with the industry's most powerful motor and gearing system. Capable of delivering the safest, most efficient process possible, without the need for down-time and stoppages.

- Feed Throughput 150 lbs/hr (Hydrated)
- Active Gearing System
- Swappable Cartridge
- Faceplate Feed Entry (three feed sizes / two plates included)
 - Plate 1: .250", .375", .450"
 - Plate 2: .315", .550", .787"
- Wet/Dry Feed
- 304 Stainless Steel and Anodized Aluminum
- 750W Motor
- Continuous Duty Cycle
- Adjustable Speed Control

AVAILABLE B4 ACCESSORIES & COMPONENTS

B4 Bucking - Cartridge	24-10027A
B4 Bucker Stand	24-0034

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



SPECIFICATIONS

Product Number	02-10008A
Input Voltage	230V, 50Hz Single Phase
Current Draw	<2A Operating, 4A Max
Drive Motor	750W
Duty Cycle	100%
Motor RPM	262-1750 RPM
Weight	285lbs /130kg
Shipping Weight (w/o stand)	338lbs / 154kg
Length (shipping)	37.5in / 96cm (39in / 100cm)
Width (shipping)	13in / 33cm (17in / 44cm)
Height (shipping)	14.5in / 37cm (28.5in / 72cm)
Roller Sets	Neoprene Rubber, FDA Approved
Motor Pulse	Yes
Reverse Operation	Yes
Maintenance Interval	> 1000 hours
Pull Speed	25-76 cm/s
Pull Strength	> 195 kg
Circuit Breaker Required	10A / 230V
Connector (plug)	CEE 7/7

Additional Requirements

Extension Cord	14/3 AWG (minimum AWG size) 15m / 50ft max length
----------------	--

Connector (plug)

CEE 7/7



TWISTER CONVEYORS

EUROPEAN MODEL

DETAILS MATTER.

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour. No downtime. No lag.

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups




EXTENDED HEIGHT FEED CONVEYOR SPECS

Product Number	26-0102E-00
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	1/30HP, 25W
Speed Range	0-35 ft/min, 0-12 m/min
Belt Width	3.75in / 9.5cm
Belt Length	60in / 152cm
Belt Height Range	32.5 - 48.75in / 82-123cm*
Belt Material	Urethane (FDA Approved)
Wall Height	3.5in / 8.9cm
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	44lbs / 20kg

EXTENDED HEIGHT QC CONVEYOR SPECS

Product Number	26-10021A
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	1/30HP, 25W
Speed Range	0-15 ft/min, 0-5 m/min
Belt Width	12in / 30.5cm
Belt Length	60in/152cm
Belt Height Range	23.8-33.9in / 60-86cm*
Belt Material	Urethane (FDA Approved)
Wall Height	N/A
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

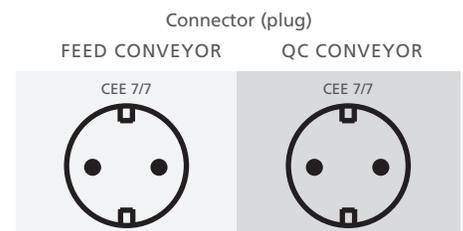

TWISTER CONVEYORS

EUROPEAN MODEL

DETAILS MATTER.

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour. No downtime. No lag.

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



FEED CONVEYOR SPECS

Product Number	26-0001E-02
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	25W
Speed Range	0-35 ft/min, 0-12 m/min
Belt Width	60in / 152cm
Belt Length	33 x .25in / .6cm
Belt Height Range	23-33in / 58-84cm*
Belt Material	Urethane (FDA Approved)
Wall Height	3.5in / 8.9cm
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	44lbs / 20kg

QUALITY CONTROL CONVEYOR SPECS

Product Number	26-0002E-02
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	25W
Speed Range	0-15 ft/min, 0-5 m/min
Belt Width	12in / 30.5cm
Belt Length	60in/152cm
Belt Height Range	19.1-21.9in / 49-53cm*
Belt Material	Urethane (FDA Approved)
Wall Height	N/A
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

