

# TWISTER CONVEYORS

## EUROPEAN MODEL

### DETAILS MATTER.

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour. No downtime. No lag.

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups




#### EXTENDED HEIGHT FEED CONVEYOR SPECS

Product Number	26-0102E-00
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	1/30HP, 25W
Speed Range	0-35 ft/min, 0-12 m/min
Belt Width	3.75in / 9.5cm
Belt Length	60in / 152cm
Belt Height Range	32.5 - 48.75in / 82-123cm*
Belt Material	Urethane (FDA Approved)
Wall Height	3.5in / 8.9cm
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	44lbs / 20kg

#### EXTENDED HEIGHT QC CONVEYOR SPECS

Product Number	26-10021A
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	1/30HP, 25W
Speed Range	0-15 ft/min, 0-5 m/min
Belt Width	12in / 30.5cm
Belt Length	60in/152cm
Belt Height Range	23.8-33.9in / 60-86cm*
Belt Material	Urethane (FDA Approved)
Wall Height	N/A
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	86lbs / 39kg

\*Optional 8" Leg Extensions Available

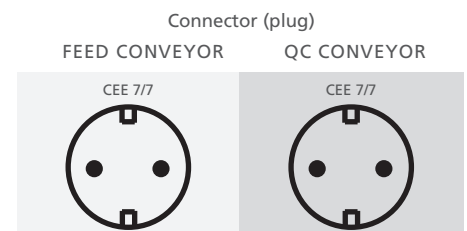

# TWISTER CONVEYORS

EUROPEAN MODEL

## DETAILS MATTER.

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour. No downtime. No lag.

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



### FEED CONVEYOR SPECS

Product Number	26-0001E-02
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	25W
Speed Range	0-35 ft/min, 0-12 m/min
Belt Width	60in / 152cm
Belt Length	33 x .25in / .6cm
Belt Height Range	23-33in / 58-84cm*
Belt Material	Urethane (FDA Approved)
Wall Height	3.5in / 8.9cm
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	44lbs / 20kg

### QUALITY CONTROL CONVEYOR SPECS

Product Number	26-0002E-02
Input Voltage	230V, 50/60Hz
Current Draw	.75A
Motor	25W
Speed Range	0-15 ft/min, 0-5 m/min
Belt Width	12in / 30.5cm
Belt Length	60in/152cm
Belt Height Range	19.1-21.9in / 49-53cm*
Belt Material	Urethane (FDA Approved)
Wall Height	N/A
Circuit Breaker Required	5A / 230V
Connector (plug)	CEE 7/7
Standards	UL / CSA / CE / ROHS
Shipping Weight	86lbs / 39kg

\*Optional 8" Leg Extensions Available

