

TWISTER

STANDARD CONVEYORS

Keep Things Moving

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour.

No downtime. No lag.

Standard Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

TWISTER


STANDARD CONVEYORS



FEED CONVEYOR SPECIFICATIONS	Product Number	02-0001-02A
	Input Voltage	115V, 50/ 60 Hz
	Current Draw	1.3A
	Motor	1/30HP, 25W
	Speed Range	0-35ft/min, 0-12 m/min
	Belt Width	50 x .25in/.3cm
	Belt Length	30 x .25in / .6cm
	Belth Height Range	23-33in / 58-84cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

QC CONVEYOR SPECIFICATIONS	Product Number	26-0002-02
	Input Voltage	115V, 50/60Hz
	Current Draw	1.3A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	19-24n / 49-60cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

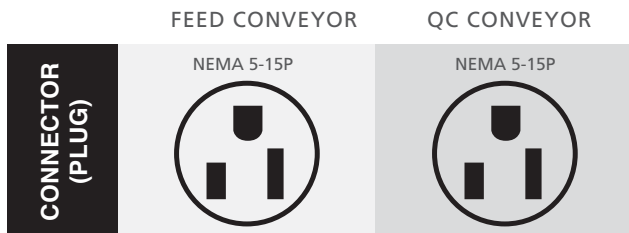

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

STAINLESS STEEL CONVEYORS

Keep Things Moving

Stainless Steel Conveyors Features

- All stainless steel construction
- FDA approved belt material
- Larger motor than standard conveyors
- Tool-less quick height adjustment
- Adjustable speed control
- Adjustable legs to match conditions
- Washdown rated VFD
- Quick release belt
- Single piece bed construction
- Isopropyl Alcohol compatible



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

TWISTER


STAINLESS STEEL CONVEYORS



STAINLESS STEEL FEED CONVEYOR SPECIFICATIONS	Product Number	26-10018A
	Input Voltage	115VAC, 60Hz
	Current Draw	0.5A
	Motor	1/10HP
	Speed Range	0-23 ft/min
	Belt Width	4in / 152.4cm
	Belt Length	58in / 147.3cm
	Belth Height Range	25-44in
	Belt Material	Polyurethane(TPU) (FDA Approved)
	Wall Height	4in
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	NONE
	Shipping Weight	82lbs / 37kg

STAINLESS STEEL QC CONVEYOR SPECIFICATIONS	Product Number	26-10019A
	Input Voltage	115VAC, 60Hz
	Current Draw	TBD
	Motor	1/10HP
	Speed Range	0-15 ft/min
	Belt Width	12in / 30.5cm
	Belt Length	58in / 147.3cm
	Belth Height Range	20-34in
	Belt Material	Polyurethane(TPU) (FDA Approved)
	Wall Height	TBD
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	NONE
	Shipping Weight	TBD

*Optional 8" Leg Extensions Available

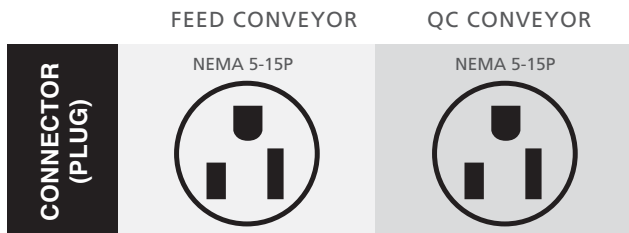

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EXTENDED HEIGHT CONVEYORS

Keep Things Moving

WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Extended Height Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



EXTENDED FEED HEIGHT:
29-46in



EXTENDED QC HEIGHT:
23-33in



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

TWISTER


EXTENDED HEIGHT CONVEYORS



EXTENDED HEIGHT FEED CONVEYOR SPECIFICATIONS	Product Number	26-0102-00
	Input Voltage	115V, 50/60Hz
	Current Draw	1.3A
	Motor	1/30HP, 25W
	Speed Range	0-35 ft/min, 0-12 m/min
	Belt Width	3.75in / 9.5cm
	Belt Length	60in / 152cm
	Belth Height Range	32.5-48.75in / 82-123cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

EXTENDED HEIGHT QC CONVEYOR SPECIFICATIONS	Product Number	26-0106
	Input Voltage	115V, 50/60Hz
	Current Draw	1.3A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	19-24n / 49-60cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

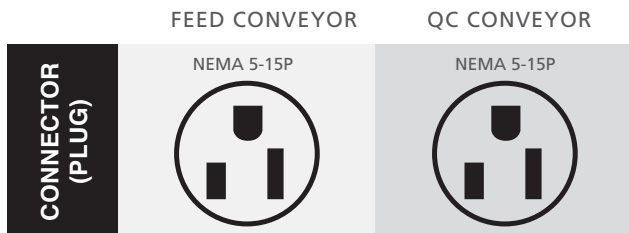

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER