

TWISTER

T2

#1 Trimming System Among Commercial Producers

T2	Type	Feed (lbs/hr)	Feed (kg/hr)
1	Wet	Up to 35	Up to 16
2	Wet	Up to 80	Up to 36
3	Wet	Up to 120	Up to 55
4	Wet	Up to 160	Up to 73
1	Dry	Up to 11	Up to 5
2	Dry	Up to 25	Up to 12



T2 Trimmer Features

- Large-Commercial Scale
- Harvest size: ~100+lbs
- Start with Tandem scale up to Triple
- Continuous flow and runtime
- 304 stainless steel tumbler to mitigate risk of contamination
- Nitrided steel blades increase strength and resistance and decrease buildup
- Minimal handling >1 min in tumbler
- Watertight electrical and motors allow for a complete high-pressure washdown
- Wheels allow for easy transport whether indoor or outdoor



TWISTER


T2



SPECIFICATIONS	Product Number	02-10006A
	Input Voltage	120V, 60 Hz
	Current Draw	15.5A
	Blade Motor	1HP, Fan-Cooled
	Tumbler Diameter	6in / 10.1cm
	Tumbler Slots	50 x .25in/.3cm
	Cut Height	.040in / 1mm
	Weight	215lbs /97.5kg
	Shipping Weight (w/ T2-LC)	420lbs / 190kg
	Length	42.5in / 107.9cm
	Width	27.5in / 69.9cm
	Height	32.5in / 82cm
	Circuit Breaker Required	20A / 120V
Connector (plug)	NEMA 5-20P	
Certifications	Special Inspection	

ACCESSORIES & COMPONENTS	T2 Leaf Collector	23-0117-00-P
	T2 Trim Saver	23-0200-01-P
	T2 Rail (Single)	24-0400-00-P
	T2 Rail Extension	24-0401-01-P
	Feed Conveyor (Inbound)	26-0001-02
	Quality Conveyor (Outbound)	26-0002-02

ADDITIONAL REQUIREMENTS	Extension Cord
	12 AWG (Minimum AWG Size)
	7.6m / 25ft max length

CONNECTOR (PLUG)	NEMA 5-20P
	

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER **B4**

The Buck Doesn't Stop

Type	Feed (lbs/hr)	Feed (kg/hr)
Wet	Up to 150	Up to 68
Dry	Up to 30	Up to 14



B4 Bucker Features

- Active Gearing System
- Pull Strength > 430lbs
- Swappable Cartridge
- 304 Stainless Steel
- 1HP Motor
- Continuous Duty Cycle
- Adjustable Speed Control
- Designed for Conveyors
- SafeFeed Input
- Interchangeable Faceplates
- GFCI compatible

The Twister B4 is the world's fastest medical cannabis bucker, equipped with the industry's most powerful motor and gearing system. Capable of delivering the safest, most efficient process possible, without the need for down-time and stoppages.



TWISTER

B4



ADDITIONAL REQUIREMENTS

Extension Cord

14/3 AWG (Minimum AWG Size)

15m / 50ft max length

CONNECTOR (PLUG)

NEMA 5-15P



SPECIFICATIONS	Product Number	02-10004A
	Input Voltage	120V, 60 Hz
	Current Draw	< 2A Operating, 6A Max
	Drive Motor	1HP
	Duty Cycle	100%
	Motor RPM	262-1750 RPM
	Shipping Weight (w/o stand)	338lbs / 154kg
	Length (shipping)	37.5in / 96cm
	Width (shipping)	13in / 33cm
	Height (shipping)	14.5in / 37cm
	Roller Sets	Neoprene Rubber
	Motor Pulse	Yes
	Reverse Operation	Yes
	Maintenace Interval	> 1000hours
Pull Speed	10 - 30in/s	
Pull Strength	> 430lbs	
Connector (plug)	NEMA 5-15P	
Circuit Breaker Required	15A / 120V	

ACCESSORIES & COMPONENTS	B4 Bucking - Cartridge	24-10027A
	B4 Bucker Stand	24-0034

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

TWISTER

TRIM SAVER

Maximize Profit Without Wasting Your Trim



w/o Trim Saver



w/ Trim Saver



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-TRIM-SAVER



Trim Saver Features

- FDA approved stainless steel bin
- FDA approved lid & fasteners
- FDA approved silicone bin lid seal
- FDA approved silicone cyclone gaskets



TWISTER

T2 TRIM SAVER



ADDITIONAL REQUIREMENTS

Extension Cord

12 AWG (Minimum AWG Size)

7.6m / 25ft max length

CONNECTOR (PLUG)

NEMA 6-20P



CS-18 T2 TRIM SAVER SPECIFICATIONS

Product Number	23-0200-01-P
Input Voltage	230V, 60Hz
Motor	3HP, 2250W Fan-Cooled
Amps (running)	15A
Amps (startup)	49A
Motor Speed	3450RPM
Airflow Capacity	1400 CFM
Static Pressure	12" W.G.
Operating Conditions	950ACFM @ 6" W.G.
Impeller	12.75in / 305mm
Hose Size	6in / 153mm
Height	72"/1.8m
Weight	123lbs / 56kg
Circuit Breaker Required	20A / 240V
Connector (plug)	NEMA 6-20P
Sound Rating	80 Db
Included Filter Bags	70 Micron, 40 Micron
Certifications	CSA

T2 TRIM SAVER ACCESSORIES & COMPONENTS

40 Micron Bag	23-0101-00
70 Micron Bag	23-0162-00
6" Hose - 6' Long	23-0199-00
6" Hose Cuff	23-0132-00
Vacuum Bypass T2	23-0255-00
Gasket (Stainless Bin Lid)	23-0244-00
Gasket (10" separator for Cyclone)	23-0240-00
Gasket (8" separator for cyclone)	23-0241-00
Gasket (cyclone outlet)	23-0251-00
Gasket (filter adapter)	23-0230-00
Stainless Steel Bin & Upgrade Kit	23-0425-00
Cyclone Cleaning Upgrade Kit	23-0264-00

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

STANDARD CONVEYORS

Keep Things Moving

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour.

No downtime. No lag.

Standard Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

TWISTER

STANDARD CONVEYORS



FEED CONVEYOR SPECIFICATIONS	Product Number	02-0001-02A
	Input Voltage	115V, 50/ 60 Hz
	Current Draw	1.3A
	Motor	1/30HP, 25W
	Speed Range	0-35ft/min, 0-12 m/min
	Belt Width	50 x .25in/.3cm
	Belt Length	30 x .25in / .6cm
	Belth Height Range	23-33in / 58-84cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

QC CONVEYOR SPECIFICATIONS	Product Number	26-0002-02
	Input Voltage	115V, 50/60Hz
	Current Draw	1.3A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	19-24n / 49-60cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

	FEED CONVEYOR	QC CONVEYOR
CONNECTOR (PLUG)	NEMA 5-15P	NEMA 5-15P

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

STAINLESS STEEL CONVEYORS

Keep Things Moving

Stainless Steel Conveyors Features

- All stainless steel construction
- FDA approved belt material
- Larger motor than standard conveyors
- Tool-less quick height adjustment
- Adjustable speed control
- Adjustable legs to match conditions
- Washdown rated VFD
- Quick release belt
- Single piece bed construction
- Isopropyl Alcohol compatible



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

TWISTER


STAINLESS STEEL CONVEYORS



STAINLESS STEEL FEED CONVEYOR SPECIFICATIONS	Product Number	26-10018A
	Input Voltage	115VAC, 60Hz
	Current Draw	0.5A
	Motor	1/10HP
	Speed Range	0-23 ft/min
	Belt Width	4in / 152.4cm
	Belt Length	58in / 147.3cm
	Belth Height Range	25-44in
	Belt Material	Polyurethane(TPU) (FDA Approved)
	Wall Height	4in
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	NONE
	Shipping Weight	82lbs / 37kg

STAINLESS STEEL QC CONVEYOR SPECIFICATIONS	Product Number	26-10019A
	Input Voltage	115VAC, 60Hz
	Current Draw	TBD
	Motor	1/10HP
	Speed Range	0-15 ft/min
	Belt Width	12in / 30.5cm
	Belt Length	58in / 147.3cm
	Belth Height Range	20-34in
	Belt Material	Polyurethane(TPU) (FDA Approved)
	Wall Height	TBD
	Circuit Breaker Required	15A / 120V
	Connector (Plug)	NEMA 5-15P
	Standards	NONE
	Shipping Weight	TBD

*Optional 8" Leg Extensions Available

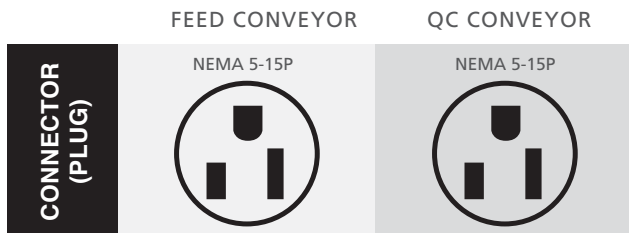

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.

