

EUROPEAN MODEL

TWISTER

T2

#1 Trimming System Among
Commercial Producers

T2	Type	Feed (lbs/hr)	Feed (kg/hr)
1	Wet	Up to 35	Up to 16
2	Wet	Up to 80	Up to 36
3	Wet	Up to 120	Up to 55
4	Wet	Up to 160	Up to 73
1	Dry	Up to 11	Up to 5
2	Dry	Up to 25	Up to 12



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-T2-TRIMMER



T2 Trimmer Features

- Large-Commercial Scale
- Harvest size: ~100+lbs
- Start with Tandem scale up to Triple
- Continuous flow and runtime
- 304 stainless steel tumbler to mitigate risk of contamination
- Nitrided steel blades increase strength and resistance and decrease buildup
- Minimal handling >1 min in tumbler
- Watertight electrical and motors allow for a complete high-pressure washdown
- Wheels allow for easy transport whether indoor or outdoor



EUROPEAN MODEL

TWISTER

T2



SPECIFICATIONS

Product Number	24-9025-02
Input Voltage	230V, 50Hz
Current Draw	8A
Blade Motor	1HP, 750W
Tumbler Diameter	6in / 10.1cm
Tumbler Slots	50 x .25in/.3cm
Cut Height	.040in / 1mm
Weight	215lbs /97.5kg
Shipping Weight (w/ T2-LC)	420lbs / 190kg
Length	42.5in / 107.9cm
Width	27.5in / 69.9cm
Height	32.5in / 82cm
Circuit Breaker Required	10A / 230V
Connector (plug)	CEE 7/7

ACCESSORIES & COMPONENTS

T2 Leaf Collector	23-0117E-00-P
T2 Trim Saver	23-0200-01-P
T2 Rail (Single)	24-0400-00-P
T2 Rail Extension	24-0401-01-P
Feed Conveyor (Inbound)	26-0001E-01
Quality Conveyor (Outbound)	26-0002E-01

ADDITIONAL
REQUIREMENTS

Extension Cord

12 AWG (Minimum AWG Size)

7.6m / 25ft max length

CONNECTOR
(PLUG)

CEE 7/7



Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER **B4**

The Buck Doesn't Stop

Type	Feed (lbs/hr)	Feed (kg/hr)
Wet	Up to 150	Up to 68
Dry	Up to 30	Up to 14



The Twister B4 is the world's fastest medical cannabis bucker, equipped with the industry's most powerful motor and gearing system. Capable of delivering the safest, most efficient process possible, without the need for down-time and stoppages.



B4 Bucker Features

- Active Gearing System
- Pull Strength > 430lbs
- Swappable Cartridge
- 304 Stainless Steel
- 1HP Motor
- Continuous Duty Cycle
- Adjustable Speed Control
- Designed for Conveyors
- SafeFeed Input
- Interchangeable Faceplates
- GFCI compatible



EUROPEAN MODEL

TWISTER

B4



ADDITIONAL
REQUIREMENTS

Extension Cord

14/3 AWG (Minimum AWG Size)

15m / 50ft max length

CONNECTOR
(PLUG)

CEE 7/7



SPECIFICATIONS

Product Number	02-10008A
Input Voltage	230V, 50Hz Single Phase
Current Draw	< 2A Operating, 4A Max
Drive Motor	1HP
Duty Cycle	100%
Motor RPM	262-1750 RPM
Shipping Weight (w/o stand)	338lbs / 154kg
Length (shipping)	37.5in / 96cm (39in/100cm)
Width (shipping)	13in / 33cm (17in/44cm)
Height (shipping)	14.5in / 37cm (28.5in/72cm)
Roller Sets	Neoprene Rubber
Motor Pulse	Yes
Reverse Operation	Yes
Maintenace Interval	> 1000hours
Pull Speed	10 - 30in/s
Pull Strength	> 430lbs
Connector (plug)	CEE 7/7
Circuit Breaker Required	10A / 230V

ACCESSORIES & COMPONENTS

B4 Bucking - Cartridge	24-10027A
B4 Bucker Stand	24-0034

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER

STANDARD CONVEYORS

Keep Things Moving

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour.

No downtime. No lag.

Standard Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

EUROPEAN MODEL

TWISTER


STANDARD CONVEYORS



FEED CONVEYOR SPECIFICATIONS	Product Number	26-0001E-02
	Input Voltage	230V, 50/ 60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-35ft/min, 0-12 m/min
	Belt Width	60in/152cm
	Belt Length	33 x .25in / .6cm
	Belth Height Range	23-33in / 58-84cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

QC CONVEYOR SPECIFICATIONS	Product Number	26-0002E-02
	Input Voltage	230V, 50/60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	19.1-21.9in / 49-53cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

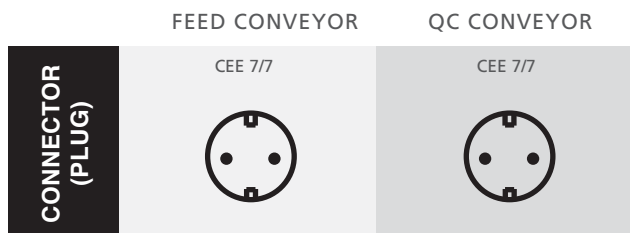

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



EUROPEAN MODEL

TWISTER

EXTENDED HEIGHT CONVEYORS

Keep Things Moving

WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Extended Height Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



EXTENDED FEED HEIGHT:
29-46in



EXTENDED QC HEIGHT:
23-33in



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

EUROPEAN MODEL

TWISTER


EXTENDED HEIGHT CONVEYORS



EXTENDED HEIGHT FEED CONVEYOR SPECIFICATIONS	Product Number	26-0102EE-00
	Input Voltage	230V, 50/60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-35 ft/min, 0-12 m/min
	Belt Width	3.75in / 9.5cm
	Belt Length	60in / 152cm
	Belth Height Range	32.5-48.75in / 82-123cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

EXTENDED HEIGHT QC CONVEYOR SPECIFICATIONS	Product Number	26-10021A
	Input Voltage	230V, 50/60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	23.8-33.9in / 60-86cm*cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

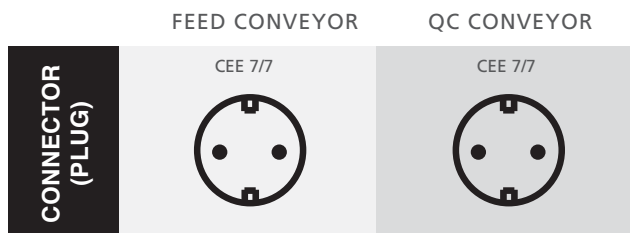

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.

