

EUROPEAN MODEL

TWISTER T4 SE

Customize Your Trim Speed

T4	Type	Feed (lbs/hr)	Feed (kg/hr)
1	Wet	Up to 23	Up to 11
2	Wet	Up to 52	Up to 24
3	Wet	Up to 78	Up to 36
1	Dry	Up to 7	Up to 3
2	Dry	Up to 16	Up to 7



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-T4-TRIMMER



Triple System



Tandem System



T4 SE Trimmer Features

- Lightweight
- Portable with its two-piece design
- Adjustable feet to allow incline
- 304 stainless steel tumbler
- Nitrided steel blades
- Stainless steel high air flow guard
- Scale up to 3 wet / 2 dry in a row
- Control box with dital controls
- Speed control of tumbler
- Speed control of blades
- Airflow control (Vacuum Bypass)



EUROPEAN MODEL

TWISTER T4 SE



SPECIFICATIONS

Product Number	24-9019-00-P
Input Voltage	230V, 60 Hz
Current Draw	2A
Blade Motor	200W
Blade Speed	980-1875 RPM
Tumbler Motor	6W
Tumbler Speed	47-96 RPM
Tumbler Diameter	5in / 10.1cm
Tumbler Slots	40 x .25in/.6cm
Cut Height	.040in / 1mm
Weight	56lbs / 25.4kg
Shipping Weight (w/ T4-LC)	120lbs / 54.4kg
Length	25in / 63.5cm
Width	15in / 38.1cm
Height	16.5in / 42cm
Circuit Breaker Required	10A / 230V
Connector (plug)	CEE 7/7
Filter Bag Included	70 Micron

ACCESSORIES & COMPONENTS

T4 Leaf Collector	23-0170E-01-P
T4 Trim Saver	23-10025A
T4 Stand (no vacuum)	23-0229-00
T4 Stainless Steel Stand (no vacuum)	23-0030
T4 Rail (Tandem)	24-0140-P
T4 Rail (Triple)	24-0139-P
Feed Conveyor (Inbound)	26-0001-02
Quality Conveyor (Outbound)	26-0002-02
Feed Conveyor (Extra Tall for T4 Rail)	26-0102-00

ADDITIONAL
REQUIREMENTS

Extension Cord
12 AWG (Minimum AWG Size)
7.6m / 25ft max length

T4 LEAF TRIMMER

T4 LEAF COLLECTOR

CONNECTOR
(PLUG)

CEE 7/7



CEE 7/7



Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER T4 PRO

High Cleanliness Environments

T4	Type	Feed (lbs/hr)	Feed (kg/hr)
1	Wet	Up to 23	Up to 11
2	Wet	Up to 52	Up to 24
3	Wet	Up to 78	Up to 36
1	Dry	Up to 7	Up to 3
2	Dry	Up to 16	Up to 7



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-T4-TRIMMER



Triple System



Tandem System



T4 PRO Trimmer Features

- Food grade stainless steel bearings
- Double sealed bearing chamber
- Maintenance free bearings
- Welded stainless steel tumbler end caps
- High air flow guard
- 304 stainless steel tumbler to mitigate the risk of contamination
- Nitrided steel blades increase strength and resistance and decrease buildup
- Commercial dishwasher safe
- Direct high pressure washing



EUROPEAN MODEL

TWISTER

T4

PRO



ADDITIONAL REQUIREMENTS

Extension Cord

14 AWG (Minimum AWG Size)

7.6m / 25ft max length

T4 LEAF TRIMMER

T4 LEAF COLLECTOR

CONNECTOR (PLUG)

CEE 7/7



CEE 7/7



SPECIFICATIONS

Product Number	24-9029-00
Input Voltage	230V, 50 Hz
Current Draw	2A
Blade Motor	200W
Blade Speed	980-1875 RPM
Tumbler Motor	6W
Tumbler Speed	47-96 RPM
Tumbler Diameter	5in / 10.1cm
Tumbler Slots	40 x .25in/.6cm
Cut Height	.040in / 1mm
Weight	90lbs / 27.2kg
Shipping Weight	115lbs / 52.1kg
Length	25in / 63.5cm
Width	15in / 38.1cm
Height	16.5in / 42cm
Circuit Breaker Required	10A / 230V
Connector (plug)	CEE 7/7
Filter Bag Included	70 Micron

ACCESSORIES & COMPONENTS

T4 Leaf Collector	23-0170E-01-P
T4 Trim Saver	23-10025A
T4 Stand (no vacuum)	23-0229-00
T4 Stainless Steel Stand (no vacuum)	23-0030
T4 Rail (Tandem)	24-0140-P
T4 Rail (Triple)	24-0139-P
Feed Conveyor (Inbound)	26-0001-02
Quality Conveyor (Outbound)	26-0002-02
Feed Conveyor (Extra Tall for T4 Rail)	26-0102-00

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER **B4**

The Buck Doesn't Stop

Type	Feed (lbs/hr)	Feed (kg/hr)
Wet	Up to 150	Up to 68
Dry	Up to 30	Up to 14



B4 Bucker Features

- Active Gearing System
- Pull Strength > 430lbs
- Swappable Cartridge
- 304 Stainless Steel
- 1HP Motor
- Continuous Duty Cycle
- Adjustable Speed Control
- Designed for Conveyors
- SafeFeed Input
- Interchangeable Faceplates
- GFCI compatible

The Twister B4 is the world's fastest medical cannabis bucker, equipped with the industry's most powerful motor and gearing system. Capable of delivering the safest, most efficient process possible, without the need for down-time and stoppages.



EUROPEAN MODEL

TWISTER

B4



ADDITIONAL
REQUIREMENTS

Extension Cord

14/3 AWG (Minimum AWG Size)

15m / 50ft max length

CONNECTOR
(PLUG)

CEE 7/7



SPECIFICATIONS

Product Number	02-10008A
Input Voltage	230V, 50Hz Single Phase
Current Draw	< 2A Operating, 4A Max
Drive Motor	1HP
Duty Cycle	100%
Motor RPM	262-1750 RPM
Shipping Weight (w/o stand)	338lbs / 154kg
Length (shipping)	37.5in / 96cm (39in/100cm)
Width (shipping)	13in / 33cm (17in/44cm)
Height (shipping)	14.5in / 37cm (28.5in/72cm)
Roller Sets	Neoprene Rubber
Motor Pulse	Yes
Reverse Operation	Yes
Maintenace Interval	> 1000hours
Pull Speed	10 - 30in/s
Pull Strength	> 430lbs
Connector (plug)	CEE 7/7
Circuit Breaker Required	10A / 230V

ACCESSORIES & COMPONENTS

B4 Bucking - Cartridge	24-10027A
B4 Bucker Stand	24-0034

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER

TRIM SAVERS

Maximize Profit Without Wasting Your Trim



w/o Trim Saver



w/ Trim Saver



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-TRIM-SAVER



Trim Saver Features

- FDA approved stainless steel bin
- FDA approved lid & fasteners
- FDA approved silicone bin lid seal
- FDA approved silicone cyclone gaskets



EUROPEAN MODEL

TWISTER

T 4 TRIM SAVER



ADDITIONAL
REQUIREMENTS

Extension Cord

12 AWG (Minimum AWG Size)

7.6m / 25ft max length

CONNECTOR
(PLUG)

CEE 7/7



CS-12 T4 TRIM SAVER SPECIFICATIONS

Product Number	23-010025A
Input Voltage	230VAC, 50Hz, 1ph
Motor	2HP
Amps (running)	7A
Amps (startup)	50A
Motor Speed	3000RPM
Airflow Capacity	1200 CFM
Static Pressure	8.5in W.G.
Operating Conditions	700CFM @ 5in W.G.
Impeller	10in
Hose Size	5in / 153mm
Height	62in / 1.6m
Weight	145lbs / 66kg
Circuit Breaker Required	13A/240V
Connector (plug)	Schuko, Type F, CEE 7/4
Sound Rating	85 dB(A)
Included Filter Bags	70 Micron, 40 Micron
Certifications	CE

T4 TRIM SAVER ACCESSORIES & COMPONENTS

40 Micron Bag	23-0101-00
70 Micron Bag	23-0162-00
6" Hose - 6' Long	23-0199-00
6" Hose Cuff	23-0132-00
5" Vacuum Hose Cuff	23-01-002127
5" Vacuum Hose	23-01-127675
Vacuum Bypass T4	23-0258-P
Gasket (8" separator for cyclone)	23-0241-00
Gasket (stainless bin lid)	23-0244-00
Gasket (cyclone outlet)	23-0234-00
Stainless Steel Bin & Upgrade Kit	23-0245-00
Cyclone Cleaning Upgrade Kit	23-0265-00

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER

STANDARD CONVEYORS

Keep Things Moving

The biggest thing to happen to trimming since the Twister. Our conveyors will change the way you harvest. The Twister Conveyors makes it easy to ensure the machine is always trimming the right amount of flowers, hour after hour.

No downtime. No lag.

Standard Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

EUROPEAN MODEL

TWISTER


STANDARD CONVEYORS



FEED CONVEYOR SPECIFICATIONS	Product Number	26-0001E-02
	Input Voltage	230V, 50/ 60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-35ft/min, 0-12 m/min
	Belt Width	60in/152cm
	Belt Length	33 x .25in / .6cm
	Belth Height Range	23-33in / 58-84cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

QC CONVEYOR SPECIFICATIONS	Product Number	26-0002E-02
	Input Voltage	230V, 50/60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	19.1-21.9in / 49-53cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

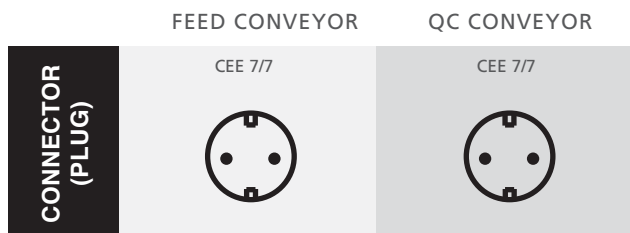

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER

EUROPEAN MODEL

TWISTER

EXTENDED HEIGHT CONVEYORS

Keep Things Moving

WATCH IT IN ACTION

TWISTERTRIMMER.COM/TWISTER-CONVEYORS



Extended Height Conveyors Features

- FDA approved feed conveyor belt
- Adjustable speed control
- Adjustable legs to match your conditions, uneven floors or custom setups



EXTENDED FEED HEIGHT:
29-46in



EXTENDED QC HEIGHT:
23-33in



Tandem T4 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T4 Trimming Machines
- 2 – Twister T4 Trim Saver Vacuums
- 2 – T4 Machine Stands
- 2 – T4 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T4 Tandem Adapters
- 1 – Twister T4 Rail, 2 machines



Tandem T2 System

COMPLETE COMMERCIAL TRIMMER SYSTEM

System Includes:

- 2 – Twister T2 Trimming Machines
- 2 – Twister T2 Trim Saver Vacuums
- 2 – T2 Machine Stands
- 2 – T2 Tumblers
- 1 – Twister Feed Conveyor
- 1 – Twister Quality Control Conveyor
- 1 – Twister T2 Tandem Adapters
- 1 – Twister T2 Rail, 2 machines

EUROPEAN MODEL

TWISTER


EXTENDED HEIGHT CONVEYORS



EXTENDED HEIGHT FEED CONVEYOR SPECIFICATIONS	Product Number	26-0102EE-00
	Input Voltage	230V, 50/60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-35 ft/min, 0-12 m/min
	Belt Width	3.75in / 9.5cm
	Belt Length	60in / 152cm
	Belth Height Range	32.5-48.75in / 82-123cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	3.5in / 8.9cm
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	44lbs / 20kg

EXTENDED HEIGHT QC CONVEYOR SPECIFICATIONS	Product Number	26-10021A
	Input Voltage	230V, 50/60Hz
	Current Draw	.75A
	Motor	1/30HP, 25W
	Speed Range	0-15 ft/min, 0-5 m/min
	Belt Width	12in / 30.5cm
	Belt Length	60in/152cm
	Belth Height Range	23.8-33.9in / 60-86cm*cm*
	Belt Material	Urethane (FDA Approved)
	Wall Height	N/A
	Circuit Breaker Required	5A / 230V
	Connector (Plug)	CEE 7/7
	Standards	UL / CSA / CE / ROHS
	Shipping Weight	86lbs / 39kg

*Optional 8" Leg Extensions Available

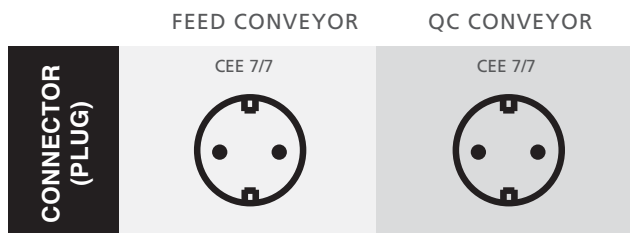

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.

